



High speed hand dryers U-shape design

WHITE FINISH

BRIGHT FINISH

SATIN FINISH

M08A

UNITS PER BOX: 1
UNITS PER PALLET: 12 (A)



PRODUCT MATERIALS:

Cover: High impact 1/8" thick ABS with antibacterial protection Microban in drying area.

Motor: Two universal brush motor, high speed.

Fan wheel: Aluminum centrifugal double asymmetric inlet fan wheel, aluminum scroll fan and safety thermal cut-off.

Sensor operation: Electronic infrared detection sensor with polycarbonate viewing window. Automatic shut-off after 23 seconds.


Mounting brackets: Galvanized steel with three holes for wall mounting.

Overall dimensions:

24-1/4" H x 11-3/4" W x 7-1/2" D

PRODUCT SPECIFICATIONS:

M08A

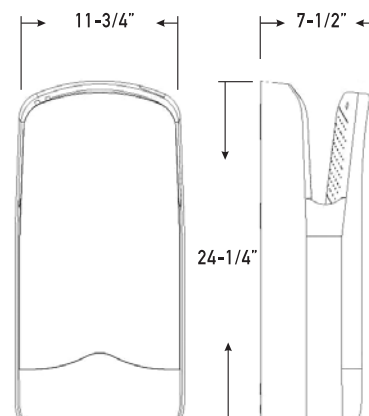


Model	120 V
Voltage	110/120 V
Frequency	50/60 Hz
Power	1750 W
Consumption	15,9 A.
Air speed	125 Mph
Drying time	10 – 15 sec
Weight	21,1 Lbs
RPM	30000
Electrical isolation	Class II (grounding not required)
Protection level	IP33
Finishes	White / Bright / Satin

HOW TO USE DUALFLOW

1 Simply place your hands (no hand movement) into the top of the hand dryer and within a few seconds 300 separate air nozzles of air will efficiently & hygienically dry your hands.

2 An infrared sensor located on the left top of the unit detects when hands are placed and after approximately 10-15 seconds your hands are dry, with the dryer automatically switching off after 23 seconds. When hands are removed the dryer will stop.

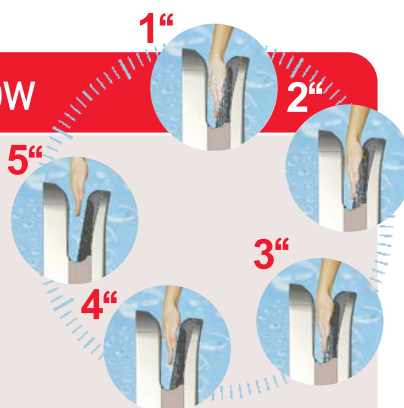

NOTE: Drying time may vary depending on conditions