

M02A-UL / M02AC-UL / M02ACS-UL

General Description

- Mediflow® Logic Dry sensor operated warm air hand dryer.
- Long durability and complete reliability, with anti-vandalism features and designed to be installed in high traffic facilities such as airports, large hotels, sport centers, large recreational areas and large official organizations, among others.
- Maximum robustness and power.
- Easy maintenance, low noise levels and a high level of user safety.
- 1/16" (1.5 mm) thick steel cover white Epoxy painted or 1/16" (1.5 mm) thick stainless steel cover bright or satin finished.
- Incorporate the technology to automatically regulate the temperature of the outlet air to 4 possible levels depending on the room temperature allowing relevant savings in electrical energy consumption.
- Made according to the highest quality and safety standards: it includes safety thermal limiters (in the heating element and in the motor) and automatic disconnect system.

Components & Materials

- **M02A-UL:** Steel one-piece cover, Epoxy painted, 1/16" (1.5 mm) thick.
- **M02AC-UL:** Stainless steel one-piece cover, bright finish, 1/16" (1.5 mm) thick.
- **M02ACS-UL:** Stainless steel one-piece cover, satin finish, 1/16" (1.5 mm) thick.
- **BASE PLATE:** made in fire resistant plastic PPA/PS-V0, with 4 Ø 5/16" (8 mm) holes for wall mounting. It includes silent-blocks to damp mechanical vibrations.
- **FAN SCROLL:** made in fire resistant plastic PPA/PS-V0.
- **MOTOR:** universal brush motor, 4,500 rpm, class A, which includes a safety thermal cut-off.
- **FAN WHEEL:** aluminium centrifugal double asymmetrical inlet fan wheel.
- **HEATING ELEMENT:** waved wire NiCr heating element on a mica frame that incorporates a thermal cut-off.
- **SENSOR:** fully adjustable (2-10") IR electronic detection sensor by means of a potentiometer.
- Automatic regulation of air temperature on ambient temperature.
- Selective detection of fixed targets and automatic disconnection system after 120 seconds of continuous use.

Technical Specifications

Voltage - 110-120V	Total power - 250-2,250 W
Frequency - 60 Hz	Motor Power - 250 W
Electrical Isolation - Class I	Heating element power: 0 - 2,000 W
Dimensions - 10 7/8"W x 12 5/8"H x 6 1/2"D	Consumption - 2.1 - 19 A
	Cover thickness - 1/16" (1.5 mm)
Weight - 9.4 Lbs	r.p.m. - 4,500
Effective airflow - 265 CFM	Air temperature - 117°F (47°C)
Air velocity - 59 mph (5,195 LFM)	Drying time - 29 sec.
Protection rating - IP23	Sound pressure ⁽¹⁾ (at 79") - 65 dBA

⁽¹⁾According to UNE EN ISO 11201:2010 V2 standard.

Operation

Place the hands under the air outlet. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflow or after 120 seconds of continuous use.

Installation

Verify all rough-in dimensions prior to installation. Hand dryers require a dedicated circuit and must be properly grounded. A GFCI (Ground fault circuit interrupter) is recommended. One side of dryer should be mounted to a stud.

Please mark the selected item



code _____
M02A-UL
material _____
steel
finish _____
white epoxy



code _____
M02AC-UL
material _____
stainless steel
finish _____
bright



code _____
M02ACS-UL
material _____
stainless steel
finish _____
satin



Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: **1-877-222-9125** or visit our website at **www.saniflowcorp.com**
Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · sales@saniflowcorp.com

HandDryerSupply.com | 804-859-2498 | sales@handdryersupply.com

Certificates & Qualifications

Unit shall be UL and CSA approved, according to UL 499 and CSA C22.2 standards.

N° dryers to be fitted

- In toilet areas with a normal frequency of use and only one wash-basin: 1 dryer.
- In toilet areas with a normal frequency of use and more than one wash-basin: 1 dryer for each 2-3 wash-basins.
- 1 row of 4 wash basins: 2 dryers; 1 row of 6 wash basins: 3 dryers; 1 row of 8 wash basins: 4 dryers.
- In toilet areas with high traffic and more than one wash-basin: 2 dryers for each 3 wash-basins.
- 1 row of 4 wash basins: 3 dryers; 1 row of 6 wash basins: 4 dryers; 1 row of 8 wash basins: 5 dryers.

Ideal location

Between the wash-basin and exit. It is not recommended to install dryer between wash-basins, next to urinals, lavatories and showers. If installing automatic dryers over marble surface or ledge, the minimum distance from the dryer to the ledge must be 15-3/4". It is recommended that hand dryers be distributed throughout the washroom area to avoid overcrowding.

Guide Specification

Surface mounted vandal resistant hand dryer shall be fabricated with one-piece 1/16" thick steel white epoxy painted cover or 1/16" thick stainless steel stainless steel AISI 304 cover, bright or satin finish. The back base shall be fire resistant plastic V0 and with 4 holes for wall mounting. The dryer shall be activated through an infrared electronic sensor and shall automatically turn off when hands are removed. Sensor shall automatically shut dryer off approximately 120 seconds after dryer turn on if inanimate object is placed. Motor shall be 1/3 hp (250W), 4,500 rpm, universal type, class A including a safety temperature limiter. The hand dryer shall have an auto-adjustable heating element with 4 heating levels: 0 -800 - 1,200 - 2,000 Watts which permit the automatic regulation of the air temperature according to the room temperature. The heating element should incorporate a safety thermal limiter. The heating element shall have an automatic disconnection 1/2 second before motor stop. The hand dryer should have an asymmetrical double inlet fan wheel, and the fan scroll shall be made of a fire resistant plastic V0. Dryer shall deliver 265 CFM of air at 117 °F (47 °C) and 5,195 LFM velocity during user controlled drying cycle. The dryer shall have a total power of from 250 to 2,250 Watts with a consumption from 2.1 to 19A. Noise level should be 65 dBA. Overall dimensions shall be 10 7/8"W x 12 5/8"H x 6 1/2"D. Unit shall be UL and CSA certified.


Surface-Mounted Hand Dryer shall be models M02A-UL, M02AC-UL & M02ACS-UL of Saniflow Corporation, 3325 NW 70th Avenue, Miami, FL 3312, USA.

Overall dimensions:



M02A-UL / M02AC-UL / M02ACS-UL: 10 7/8"W x 12 5/8"H x 6 1/2"D (275 x 325 x 164 mm)

Weight: 9.4 Lbs

MOUNTING

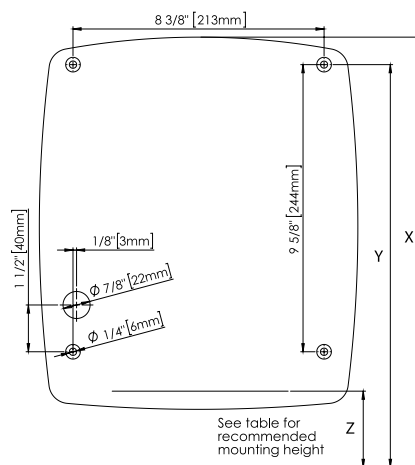

M02A-UL / M02AC-UL / M02ACS-UL

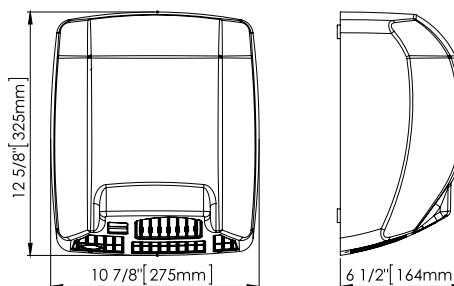


Recommended heights from floor



	Male	Female	Child	Disabled
x To top of machine	57-1/8" / 145 cm	55-1/8" / 140 cm	47-1/4" / 120 cm	49-1/4" / 125 cm
y To mounting bracket screw	56-1/4" / 143 cm	54-3/8" / 138 cm	46-1/2" / 118 cm	48-3/8" / 123 cm
z To sensor top	46-1/8" / 117 cm	44-1/8" / 112 cm	36-1/4" / 92 cm	37-1/4" / 97 cm

Serial mounting

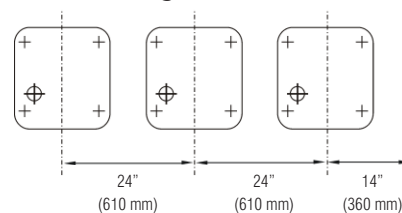

Job:	Architect / Engineer:	City / State / Country:
Model number:	Contractor:	Date:
Variations:	Customer / Wholesaler:	Quantity:

Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: **1-877-222-9125** or visit our website at www.saniflowcorp.com
Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · sales@saniflowcorp.com

HandDryerSupply.com | 804-859-2498 | sales@handdryersupply.com